



# Tekniske specifikationer




BREDDE	30	40	50	60	70	80	90	100	110	120	130	140	-	-	-
Skuffe indeni	257	357	457	557	Kombinationer af flere skuffer										
Ekstern enhed	315	415	515	615	715	815	915	1.015	1.115	1.215	1.315	1.415			

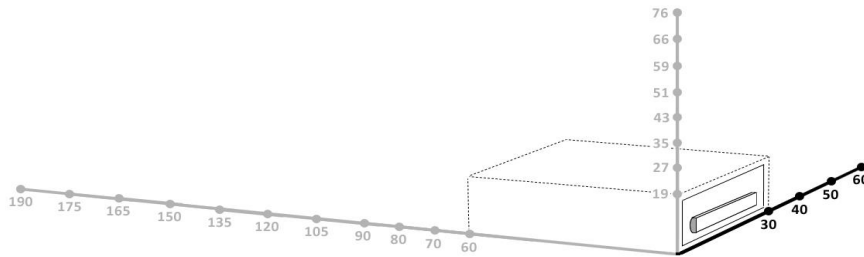

HØJDE	19	27	35	43	51	59	66	76	84	92	100	108	115	123	131
Skuffe indeni	117	196	275	354	432	511	590	669	Kombinationer af flere skuffer						
Aluminium skuffeskinne højde	86	86	188	188	330	330	330	330							
Højde af aluminiumsskillevæg	76	76	178	178	320	320	320	320							
Ekstern enhed	191	270	348	427	506	585	663	761	839	918	996	1.075	1.154	1.233	1.310

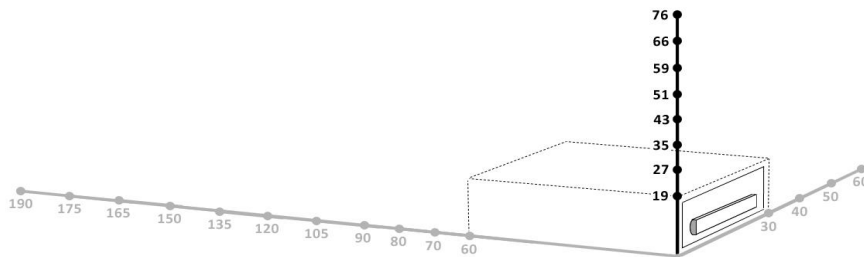


DYBDE	60	70	80	90	105	120	135	150	165	175	190	-	-	-	-
Skuffe indeni	457	557	657	757	902	1.047	1.192	1.337	1.482	1.627	1.772				
Procentdel af åbning af bakke (%)	76%	80%	83%	85%	82%	85%	87%	88%	89%	90%	91%				
Standard-partition	-	-	-	-	1 skillevæg er monteret under produktionen 431 mm fra fronten										
Max. belastningskapacitet pr. Skuffe	60 KG					100 KG									
Ekstern enhed	591	691	791	891	1.036	1.181	1.326	1.471	1.616	1.761	1.906				

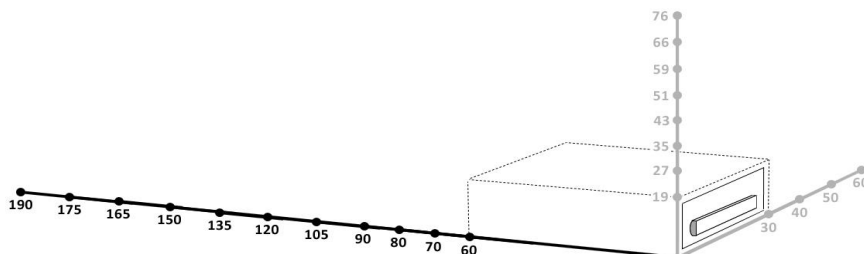




BREDE	30	40	50	60	-	-	-	-	-	-	-	-	-	-
Åbent rum indeni	275	374	473	572										
Ekstern enhed	315	415	515	615										

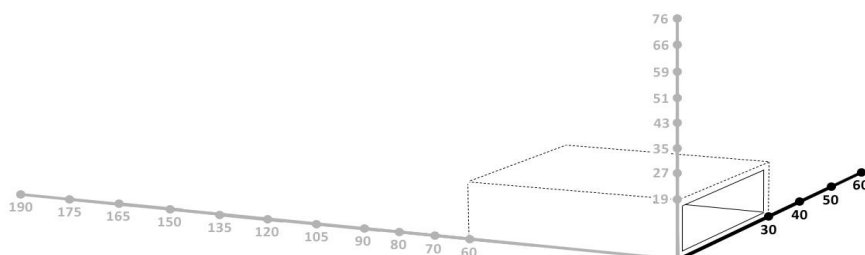

HØJDE	19	27	35	43	51	59	66	76	-	-	-	-	-	-
Åbent rum indeni	161	240	318	397	476	555	633	731						
Ekstern enhed	191	270	348	427	506	585	663	761						

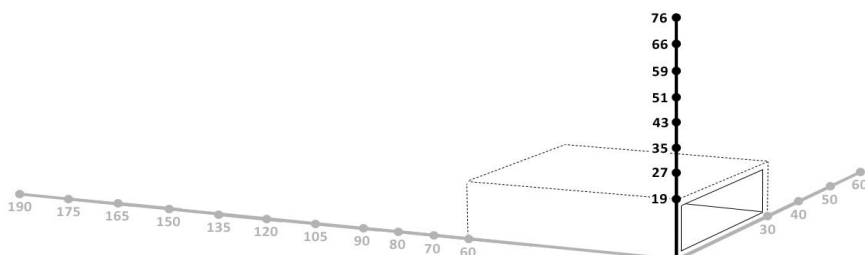

DYBDE	60	70	80	90	105	120	135	150	165	175	190	-	-	-	-
Åbent rum indeni	540	640	740	840	985	1.130	1.275	1.420	1.565	1.710	1.855				
Ekstern enhed	556	656	756	856	1.001	1.146	1.291	1.436	1.581	1.726	1.871				

